


# This Antenna Is Too Good To Be True

*It's cheap. It works well on all bands.  
And it radiates a super signal.*

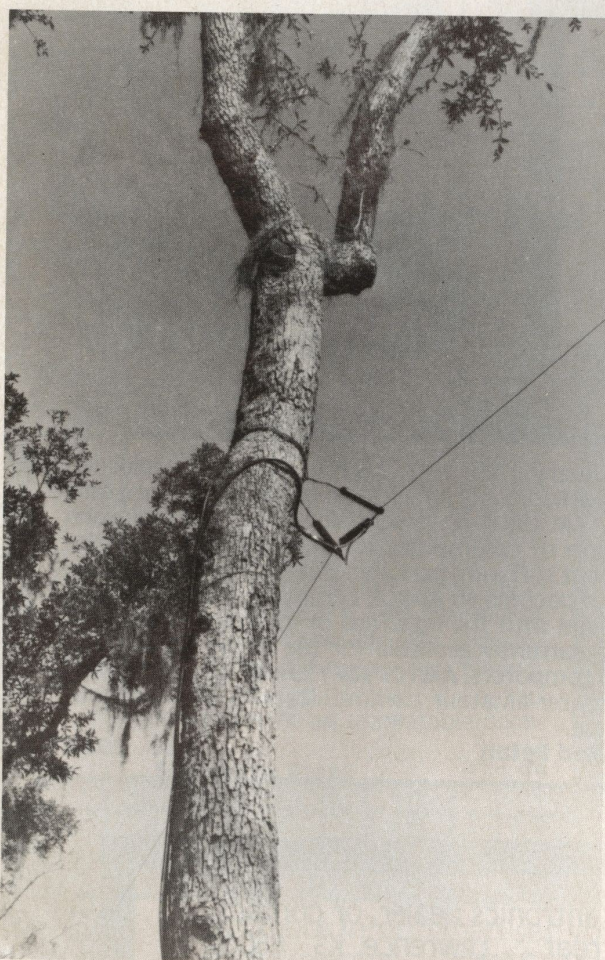

*Completed antenna mounted in tree.*

Would you like to have an antenna that is capable of working all the HF bands, or any combination of the HF bands including the new WARC bands, with excellent results, at a fraction of the cost of any of the commercially-available multi-band antennas now on the market? Would you also like to have an antenna with an extremely low noise factor? I'm about to describe an antenna that is just what you've been looking for.

This antenna is a combination of the old reliable Zepp with the addition of a balanced, shielded feeder system which has been described in various articles in past years.

This antenna has been in

use at this QTH as well as other locations for over two years and has yielded many fine DX contacts and many good reports stateside.

To determine the comparable merit of this antenna, I erected separate dipoles cut for the center of each band and fed with a single coaxial cable. Then I connected all antennas so they could be switched rapidly to determine the comparable signal strength of each as compared to the Zepp antenna.

In addition to the favorable signal strength comparisons, I also found that the noise level on the Zepp antenna was as much as 5 S-units lower than the noise on the cut-to-frequency dipole with single coax feed. I noticed this particularly on

## Desired Bands of Operation

160-10 meters  
80-10 meters  
40-10 meters  
30-10 meters  
20-10 meters  
17-10 meters  
15-10 meters  
12-10 meters

## Length of Each Side of Antenna From Center to Each End

108 feet  
54 feet  
27 feet  
18.7 feet  
13.5 feet  
10.4 feet  
9 feet  
7.8 feet

Table 1.



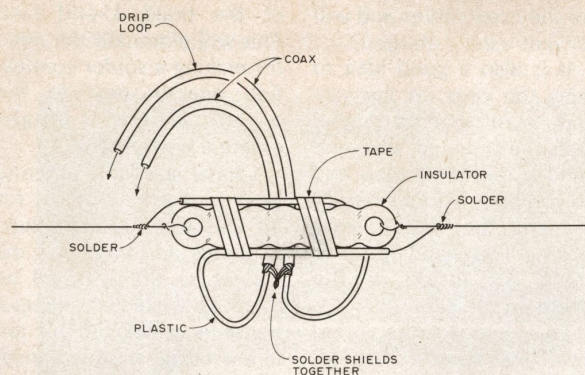


Fig. 1. Method of supporting coax cables.

the model of this antenna which was erected inside the attic of the house in close proximity to the ac wiring of the building, where the noise level dropped from an S-7 on the regular dipole to an S-2 on the Zepp antenna.

To erect this antenna, you simply figure the length of each side of the flat-top from the center to one end by using the figures shown in Table 1.

This antenna can be cut for operation on any combination of the HF ham bands, including the WARC bands which have not yet been released. For example, if your space is limited, you could put an antenna in the attic of the house, as I did at one location where I had an attic length of only about 30 feet, by figuring the antenna for operation on the bands from 30 through 10 meters, resulting in a length each side of center of 18.67 feet. Then I ran the wire in a Z configuration through the attic to compress it into the available space.

I have used various configurations on this antenna, such as the halo and the inverted vee, and all give good results. If you can get the wire running in a fairly straight line, though, your radiation pattern will be more predictable.

The flat-top portion is designed so that it is non-resonant on all bands of operation, thereby avoiding any extremely high or extremely

low impedance points at the feedpoint. It is designed to be resonant between the one-quarter, half, three-quarter, and full-wave points on each band, thereby presenting an impedance to the antenna tuner which is well within range of the tuner on each band and will not cause any loading problems. An antenna tuner is required which has a built-in balun or you must use a 4-to-1 balun at the bottom end of the line if you don't have one built in the tuner itself.

The feedline is made of two runs of RG-8/U cable for powers up to 2 kW PEP, or for low-power operation under 100 Watts output, RG-58/U cable may be used. The lower loss of the larger cable is to be desired, however, even if low power is used.

At the top end of the

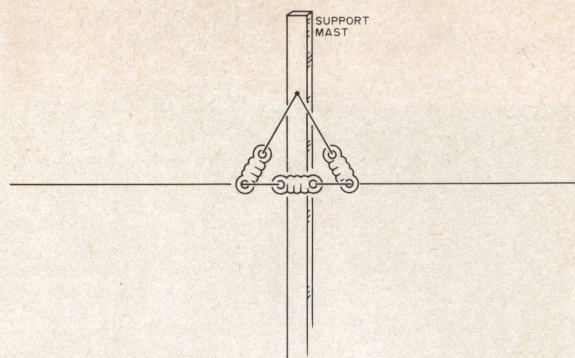


Fig. 2. Method of supporting antenna at center.

feedline, you connect the shields of the two coax cables together but *do not* connect them to anything else. Then at the bottom end of the line, the shields are tied together and connected to the ground connection in the shack and to the frame of the tuner.

The inner conductors of the coax cables are tied to each leg of the antenna wire at the top of the line, and at the bottom end of the line they are connected to each of the balanced-output terminals of the antenna tuner.

The feedline can be run anywhere—underground, through metal or vinyl conduit, or in the open. The advantage of this arrangement, however, is that unlike the old open-wire feedline previously used on Zepp antennas, it does not have to be kept clear of surrounding objects and is not

affected by anything it lies against.

There is only one precaution that must be observed, and that is to cut both runs of the cable exactly the same length. They do not have to be run together, however, as the shield on the cables provides exact electrical separation of the inner conductors even if the two cables are widely separated.

As to the length of the feedline, I found that best results were observed with line lengths of a little more than one-quarter wavelength at the lowest frequency of operation (or anything longer than that). Try to avoid making the feedline resonant at any particular frequency you are operating on, particularly the quarter-wave points, or you may have a bit of trouble tuning on this band. Optimum length seemed to be about 55 feet for 80-through-10-meter operation.

As for the mechanical construction, it is a good idea to use a long insulator, the same type used on the ends of the antenna, at the center of the antenna. Then slip the end of another insulator of the same type over the wire on either side of the center insulator, coming off at right angles to the wire and tying the support wire to these two side insulators so that equal pull is achieved on either side of the center insulator. Then



Center support and coaxial connections.



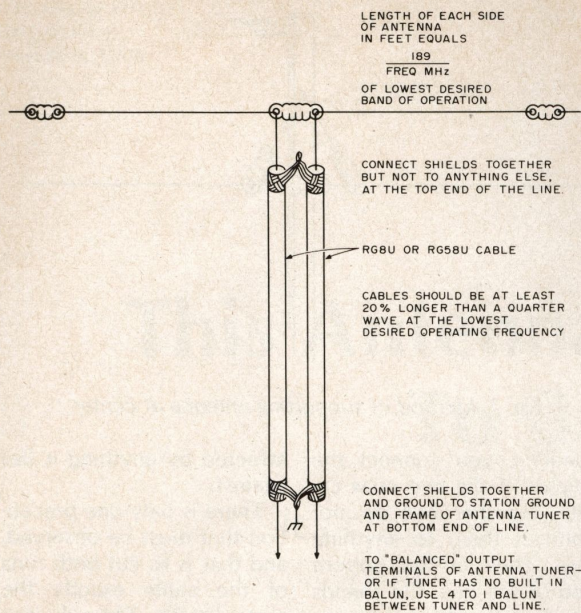


Fig. 3. Allband trapless antenna for HF.

at the point where you need to support the two coax cables, just strip off about 2 feet of the braid, leaving the plastic inner insulation, and bend this part along the center insulator on each side and tape securely to the insulator. This will make a very solid support

for the coax cables and will prevent wind damage.

It is also a good idea to bring the coax up the support mast a little higher than the antenna wire and bend it over in a loop and down about a foot or so to prevent the water from leaking into and running down the inside of the shield on the cables.

To separate the braid from the inner conductor on the coax, strip the outside plastic covering off about two feet from the end, then take the end of the shield and push it down, compressing it so that it becomes larger in diameter. Then take an awl or the tip of a small screwdriver and carefully spread the strands of the braid apart, opening up a hole in one side of the braid. At this point, bend the coax in a U shape and pull the plastic insulated center conductor out through the hole in the side

of the braid, U-end first. This will eliminate the need for making a solder connection directly next to the plastic where it might create a weak spot.

I have used this antenna in various situations cut for all different combinations of bands and have had excellent results with all of them. I have also made up a portable version of this antenna using stranded insulated wire such as zip-cord and RG-58/U cables which I use in conjunction with a small antenna tuner for operation on 20 through 10 meters. This one is only 13.5 feet long either side of center with two runs of coax 20 feet long. It is ideal for stringing up in a motel room or apartment by supporting it with nylon fishing line. Just keep the antenna out a foot or so from the wall and support it by anything you can find to tie it to. Try it. You'll like it! ■